



# Designed to perform.

## Product advantages

- 01 Robust and durable
- 02 Lower costs and efficient servicing
- 03 Intelligent control and an open system
- 04 Design flexibility
- 05 Repairable and sustainable

Maximum flexibility in terms of system design with minimal overall system operating costs: the robust Fronius Tauro inverter makes large-scale PV systems even more cost-effective. Whether under direct sunlight or in extreme heat, its double-walled housing and active cooling enable full power and maximum yields even under the harshest environmental conditions. At the same time, the sturdy project inverter from Austria is quick to install and maintain.

**Fronius Tauro. Designed to perform.**

# The solution for large-scale PV systems

## 01 Robust and durable

Designed to buck direct sunlight and high temperatures: its double-walled housing and active cooling give the Fronius Tauro a long service life and make it a robust commercial solar inverter that will always deliver top performance.

## 02 Lower costs and efficient servicing

For minimal overall system operating costs: Fronius Tauro is quick to install and efficient to maintain. When servicing is required, only the affected power stage set needs to be replaced rather than the entire project inverter. This makes for safe operation and fast, cost-efficient servicing.

## 03 Intelligent control and an open system

Like all Fronius products, Fronius Tauro can be conveniently monitored, controlled and maintained from a smartphone or PC. Fronius Solar.web lets you keep an eye on your system at all times. Its open system architecture means third-party components are easily integrated.

## 04 Design flexibility

Centralised, decentralised, vertical or horizontal: Fronius Tauro offers you maximum flexibility in the design and installation of large-scale PV systems. The flexible Tauro and the cost-effective Tauro ECO can be combined in any way you choose. Pre-integrated surge protection device and AC daisy chaining reduce the need for additional components and cables.


## 05 Repairable and sustainable

Fronius Tauro shows that sustainability at every stage of the product cycle pays dividends. The project inverter is designed for durability and was developed and produced in Austria with the fewest possible, replaceable components. This makes the Tauro particularly robust and failure-resistant, and means that only individual parts need to be replaced during on-site servicing, thereby saving time and conserving resources.


01



02

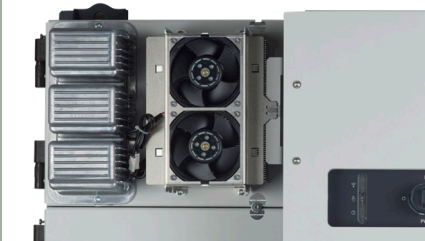

03

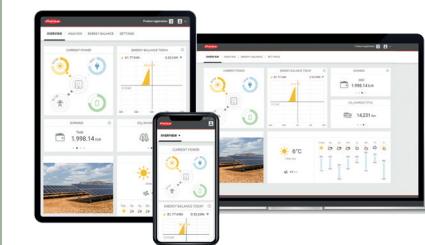

04



Fronius Tauro is available in two versions:

- **Fronius Tauro** | 50 kW | 3 MPP trackers
- **Fronius Tauro ECO** | 50, 99.99 and 100 kW | 1 MPP tracker

# Technical data

Fronius Tauro. Designed to perform.

			Tauro			Tauro ECO						
			50-3-P			50-3-P		99-3-P		100-3-P		
Input data	Number of MPP trackers		3			1		1		1		
	Max. input current ( $I_{dc\ max}$ )	A	134			87.5		175		175		
	Max. short circuit current ( $I_{sc\ max}$ , inverter)	A	240			178		250		250		
	DC input voltage range ( $U_{dc\ min} - U_{dc\ max}$ )	V	200 - 1000			580 - 1000		580 - 1000		580 - 1000		
	Feed-in start voltage ( $U_{dc\ start}$ )	V	200			650		650		650		
	Usable MPP voltage range ( $U_{mpp\ min} - U_{mpp\ max}$ )	V	400 - 870			580 - 930		580 - 930		580 - 930		
	Max. PV generator power ( $P_{dc\ max}$ )	kWp	75			75		150		150		
			PV1	PV2	PV3	PV1	PV2	PV1	PV2	PV1	PV2	
	Max. input current module field	A	36	36	72	75	75	100	100	100	100	
	Max. short circuit current	A	72	72	125	125	125	125	125	125	125	
Number of DC connections		1	1	1	1	1	1	1	1	1		
Output data	AC nominal output ( $P_{ac,r}$ )	W	50,000			50,000		99,990		100,000		
	Max. output power	VA	50,000			50,000		99,990		100,000		
	AC output current ( $I_{ac\ max}$ )	A	76			76		152		152		
	Grid connection ( $U_{ac,r}$ )	V	3~ NPE 400/230; 3~ NPE 380/220									
	Frequency (frequency range $f_{min} - f_{max}$ )	Hz	50 / 60 (45 - 65)									
	Power factor ( $\cos\ \phi_{ac,r}$ )		0 - 1 ind. / cap.									
General data	Dimensions (height x width x depth)	mm	755 x 1109 x 346 (without wall mount)									
	Weight	kg	92			74		103		103		
	Degree of protection		IP 65			IP 65		IP 65		IP 65		
	Protection class		1			1		1		1		
	Night-time consumption	W	< 16			< 16		< 16		< 16		
	Cooling		Active Cooling Technologie and Double-Wall System									
	Installation		Indoor and outdoor <sup>1</sup>									
	Ambient temperature range	°C	-40 to +65 °C <sup>2</sup>									
	Certificates and compliance with standards <sup>3</sup>		AS/NZS 4777.2:2020   IEC62109-1/-2   VDE-AR-N 4105:2018   IEC62116   EN50549-1:2019 & EN50549-2:2019   VDE-AR-N 4110:2018   CEI 0-16:2019   CEI 0-21:2019									
Connection technology	AC	Cable cross section	mm <sup>2</sup>	35 - 240			35 - 240		70 - 240		70 - 240	
		AC conductor material		Al and Cu								
		Connection terminals		Cable lug or V clamps								
		Multi Core Cable (default option)		Cable gland: 1 x multi core connection Ø 16 - 61.4 mm + 1 x M32								
		Single Core Cable (custom option)		Cable gland: 5 x M40 (10 - 28 mm)								
		AC Daisy Chaining (custom option)		Cable gland: 10 x M32 (10 - 25 mm)								
	DC	Cable cross section	mm <sup>2</sup>	25 - 95								
		AC conductor material		Al and Cu								
		Connection terminals		Cable lug or V clamps   Cable gland: 6 x M40 (10 - 28 mm)								
Efficiency	Max. efficiency	%	98.5			98.5		98.5		98.5		
	European efficiency ( $\eta_{EU}$ )	%	98.3			98.2		98.2		98.2		
	MPP-adaptation efficiency	%	> 99.9			> 99.9		> 99.9		> 99.9		

<sup>1</sup> Direct sunlight is possible

<sup>2</sup> Optional AC-disconnect mounted inside the inverter: from -30 to +65 °C

<sup>3</sup> These are planned certificates. For the current certificates, please see [www.fronius.com/tauro-cert](http://www.fronius.com/tauro-cert)

		Tauro	Tauro ECO		
		50-3-P	50-3-P	99-3-P	100-3-P
Protection devices	DC disconnector		integrated		
	Overload behaviour		Operating point shift, power limitation		
	Reverse polarity protection		integrated		
	RCMU		integrated		
	DC insulation measurement		integrated		
	DC/AC surge protection		Type 1 + 2 integrated <sup>4</sup> , Type 2 optional		
Interfaces	Wi-Fi		Fronius Solar.web, Modbus TCP Sunspec, Fronius Solar API (JSON)		
	Ethernet LAN RJ45 <sup>6</sup>		10/100 Mbit; max. 100 m Fronius Solar.web, Modbus TCP Sunspec, Fronius Solar API (JSON)		
	USB (type A socket)		1A @ 5V max.		
	Wired Shutdown (WSD)		Emergency stop		
	2 x RS485		Modbus RTU SunSpec		
	6 digital inputs / 6 digital I/Os		Programmable interface for ripple control receiver, energy management, load control		
	Datalogger and Webserver <sup>6</sup>		Integrated		

<sup>4</sup> Typ 1 + 2: Iimp 5kA




<sup>5</sup> For power supply only

<sup>6</sup> An Ethernet star-configuration is used for communication with multiple inverters. Each individual inverter communicates independently with the network/Internet via its integrated data logger




## Measurably better

The performance speaks for itself: Fronius Tauro delivers impressive performance, with constant efficiency and maximum output at temperatures up to 50 °C.

## Efficiency

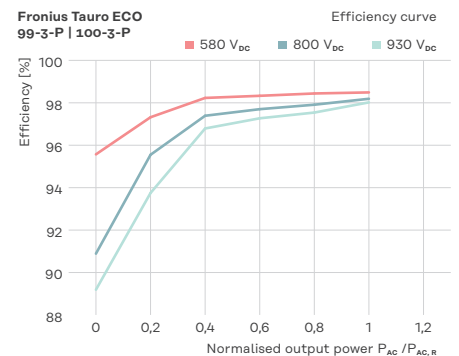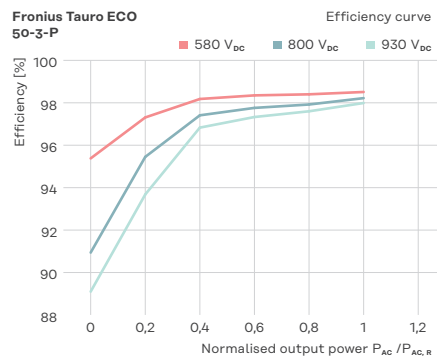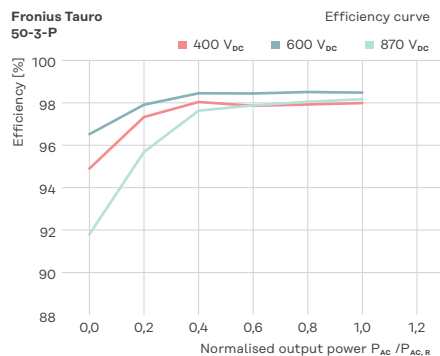

## Power derating

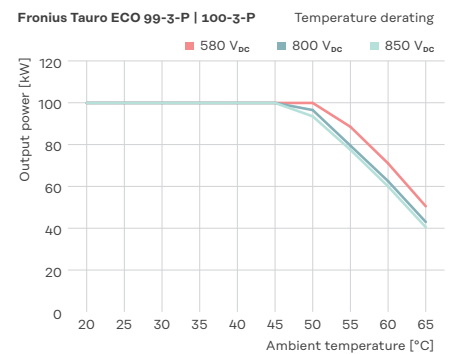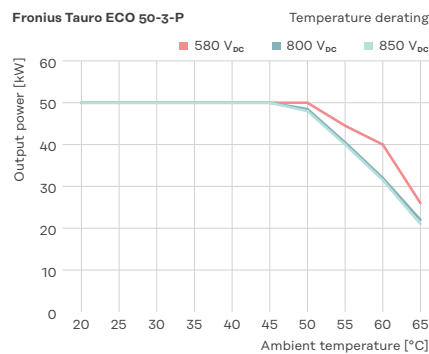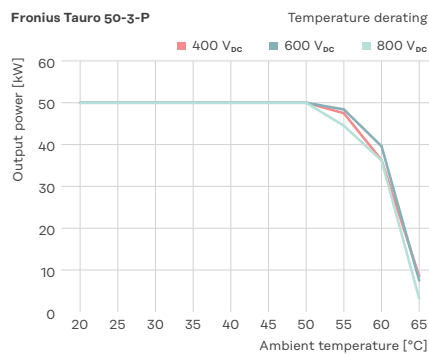

For more information about the product, visit: [www.fronius.com/tauro](http://www.fronius.com/tauro)

**Fronius India Private Limited**  
Plot no BG-71/2/B,  
Pimpri Industrial Area,  
MIDC- Bhosari,  
Pune- 411026, India  
pv-sales-india@fronius.com  
www.fronius.in

**Fronius Canada Ltd.**  
2875 Argenta Road, Units 4, 5 & 6  
Mississauga, ON L5N 8G6  
Canada  
pv-sales-canada@fronius.com  
www.fronius.ca

**Fronius Australia Pty Ltd.**  
90-92 Lambeck Drive  
Tullamarine VIC 3043  
Australia  
pv-sales-australia@fronius.com  
www.fronius.com.au

**Fronius UK Limited**  
Maidstone Road, Kingston  
Milton Keynes, MK10 0BD  
United Kingdom  
pv-sales-uk@fronius.com  
www.fronius.co.uk

**Fronius International GmbH**  
Froniusplatz 1  
4600 Wels  
Austria  
pv-sales@fronius.com  
www.fronius.com

EN VQ1 Jan 2022

Text and images correspond to the current state of technology at the time of printing. Subject to modifications. All information is without guarantee in spite of careful editing - liability excluded. Information Class: Public. Copyright © 2022 Fronius™. All rights reserved.